

The background of the entire image is composed of various overlapping, irregular shapes in shades of light green, dark green, and grey. These shapes are layered to create a sense of depth and texture, resembling a stylized, abstract landscape or a complex geometric pattern.

ConTeXt

commands

EN

ConTeXt

commands

en / english
June 27, 2012

`\about {1.} [2.]`

- 1 CONTENT
- 2 REFERENCE

`\adaptlayout [...,1...] [...,2,...]`
OPTIONAL

- 1 NUMBER
- 2 `height` = DIMENSION max
- `lines` = NUMBER

`\appendix [...,1...] {2.}`
OPTIONAL

- 1 REFERENCE
- 2 CONTENT

`\at {1.} {2.} [...3.]`

- 1 CONTENT
- 2 CONTENT
- 3 REFERENCE

`\atpage [...]`

- * REFERENCE

`\background {*.}`

- * CONTENT

`\blackrule [...,*,...]`
OPTIONAL

- * *inherits from* \setupblackrules

`\blackrules [...,*,...]`

- * *inherits from* \setupblackrules

`\blank [...,*...]`
OPTIONAL

- * small medium big nowhite back white disable force reset line halfline FORMULA fixed flexible none always outer joinedup

`\bookmark [...1.] {2.}`
OPTIONAL

- 1 IDENTIFIER
- 2 CONTENT

`\but [...]`

- * REFERENCE

`\button [...,1,...] {2.} [...3,...]`
OPTIONAL

- 1 *inherits from* \setupbuttons
- 2 CONTENT
- 3 REFERENCE

`\bypassblocks [...,1...] [...2,...]`
OPTIONAL

- 1 IDENTIFIER
- 2 IDENTIFIER

`\CAP {*.}`

- * CONTENT

| |
|---|
| <p><code>\Cap {...}</code></p> <p>* CONTENT</p> |
| <p><code>\Caps {... *. ... }</code></p> <p>* WORD</p> |
| <p><code>\Character {...}</code></p> <p>* CONTENT</p> |
| <p><code>\Characters {...}</code></p> <p>* CONTENT</p> |
| <p><code>\cap {...}</code></p> <p>* CONTENT</p> |
| <p><code>\chapter [...¹...] {..².}</code></p> <p><small>OPTIONAL</small></p> <p>1 REFERENCE</p> <p>2 CONTENT</p> |
| <p><code>\character {...}</code></p> <p>* CONTENT</p> |
| <p><code>\characters {...}</code></p> <p>* CONTENT</p> |
| <p><code>\chem {...¹.} {...².} {...³.}</code></p> <p>1 CONTENT</p> <p>2 CONTENT</p> <p>3 CONTENT</p> |
| <p><code>\clip [...,<u>¹</u>...] {..².}</code></p> <p><small>OPTIONAL</small></p> <p>1 <i>inherits from</i> \setupclipping</p> <p>2 CONTENT</p> |
| <p><code>\clonefield [...¹.] [...²...] [...³.] [...,⁴...]</code></p> <p><small>OPTIONAL</small></p> <p>1 IDENTIFIER</p> <p>2 IDENTIFIER</p> <p>3 IDENTIFIER</p> <p>4 IDENTIFIER</p> |
| <p><code>\color [...¹.] {...².}</code></p> <p>1 TEXT</p> <p>2 CONTENT</p> |
| <p><code>\column</code></p> |
| <p><code>\comment [...¹.] [...,<u>²</u>...] {...³.}</code></p> <p><small>OPTIONAL OPTIONAL</small></p> <p>1 IDENTIFIER</p> <p>2 <i>inherits from</i> \setupcomment</p> <p>3 CONTENT</p> |
| <p><code>\comparecolorgroup [...*]</code></p> <p>* IDENTIFIER</p> |

| |
|---|
| \comparepalet [...] * IDENTIFIER |
| \completeCOMBINEDLIST [...] ¹ [..., ² ...] <small>OPTIONAL</small> 1 IDENTIFIER 2 inherits from \setupcombinedlist |
| \completelistofFLOATS |
| \completelistofSORTS |
| \completelistofSYNONYMS |
| \completeREGISTER [..., [*] ...] <small>OPTIONAL</small> * inherits from \setupregister |
| \convertnumber {...} ¹ {...} ² 1 CONTENT 2 CONTENT |
| \copyfield [...] ¹ [...] ² ,... 1 IDENTIFIER 2 IDENTIFIER |
| \correctwhitespace {...} [*] * CONTENT |
| \coupledocument [...] ¹ [...] ² [...] ³ 1 IDENTIFIER 2 file 3 IDENTIFIER |
| \coupledREGISTER [...] ¹ {...} ² <small>OPTIONAL</small> 1 TEXT 2 INDEX |
| \couplemarking [...] ¹ [...] ² 1 IDENTIFIER 2 IDENTIFIER |
| \couplepage [...] ¹ ,... [...] ² ,... 1 IDENTIFIER 2 option = doublesided before = COMMAND after = COMMAND |
| \couplepaper [...] [*] * IDENTIFIER |
| \coupleregister [...] [*] * IDENTIFIER |
| \crlf |

`\currentdate [...*,...]`

* *inherits from* \date

`\currentheadnumber`

`\date [...,1_,...]` `[...,2_,...]`
OPTIONAL OPTIONAL

1 d = NUMBER

m = NUMBER

y = NUMBER

2 day month year weekday d m y w dd mm yy space -- day+ d+ dd+ referral TEXT

`\decouplemarking [...*]`

* IDENTIFIER

`\define [...1.] \2... {3...}`
OPTIONAL

1 NUMBER

2 CSNAME

3 CONTENT

`\defineblank [...1.] [...2.]`

1 IDENTIFIER

2 *inherits from* \setupblank

`\defineblock [...*]`

* IDENTIFIER

`\definebodyfont [...,1_,...]` `[...2.] [...,3_,...]`
OPTIONAL

1 5pt ... 12pt small big

2 rm ss tt hw cg mm

3 tf = FILE

bf = FILE

sl = FILE

it = FILE

bs = FILE

bi = FILE

sc = FILE

mr = FILE

ex = FILE

mi = FILE

sy = FILE

ma = FILE

mb = FILE

mc = FILE

md = FILE

`\definebodyfont [...1.] [...2.] [...3.]`

1 IDENTIFIER

2 *inherits from* \setupbodyfont

3 *inherits from* \setupbodyfont


```

\definebodyfontenvironment [.1.] [.2.] [...,3.,...]
                                OPTIONAL          OPTIONAL

1  IDENTIFIER
2  5pt ... 12pt default
3  text          = DIMENSION
    script       = DIMENSION
    scriptscript = DIMENSION
    x            = DIMENSION
    xx           = DIMENSION
    a            = DIMENSION
    b            = DIMENSION
    c            = DIMENSION
    d            = DIMENSION
    small        = DIMENSION
    big          = DIMENSION
    interlinespace = DIMENSION
    em           = normal bold slanted boldslanted type cap small... COMMAND

```

```

\definebodyfont [.1.] [.2.] [.3.]

1  inherits from \setupbodyfont
2  inherits from \setupbodyfont
3  IDENTIFIER

```

```

\definebuffer [...]

*  IDENTIFIER

```

```

\definecolor [.1.] [...,2.,...]

1  IDENTIFIER
2  r = TEXT
    g = TEXT
    b = TEXT
    c = TEXT
    m = TEXT
    y = TEXT
    k = TEXT
    s = TEXT
    h = TEXT
    t = TEXT
    a = TEXT
    p = TEXT
    e = TEXT

```

```

\definecolorgroup [.1.] [.2.] [x:y:2=,...]
                                OPTIONAL

1  IDENTIFIER
2  rgb cmyk gray s
3  TRIPLET

```

```

\definecombinedlist [.1.] [...,2,...] [...,3.,...]
                                OPTIONAL

1  IDENTIFIER
2  LIST
3  inherits from \setupcombinedlist

```

```

\defineconversion [.1.] [.2.]

1  IDENTIFIER
2  COMMAND TEXT

```

```

\definedescription [.1.] [...,2.,...]
                                OPTIONAL

1  IDENTIFIER
2  inherits from \setupdescriptions

```

```

\definedfont [...]

*  inherits from \definefont

```

```
\defineenumeration [...,1...] [...,2...] [...,3...,...]
                                OPTIONAL      OPTIONAL
1  IDENTIFIER
2  IDENTIFIER
3  inherits from \setupenumerations
```

```
\definefield [...,1...] [...,2...] [...,3...] [...,4...] [...,5...]
                                                OPTIONAL
1  IDENTIFIER
2  text line push check radio combo choice popup
3  IDENTIFIER
4  IDENTIFIER
5  IDENTIFIER
```

```
\definefieldstack [...,1...] [...,2...,...] [...,3...,...]
1  IDENTIFIER
2  IDENTIFIER
3  inherits from \setupfields
```

```
\definefiguresymbol [...,1...] [...,2...] [...,3...,...]
                                                OPTIONAL
1  IDENTIFIER
2  TEXT
3  inherits from \setuexternalfigures
```

```
\definefloat [...,1...] [...,2...]
1  SINGULAR NAME
2  PLURAL NAME
```

```
\definefont [...,1...] [...,2...] [...,3...]
                                                OPTIONAL
1  IDENTIFIER
2  FILE
3  TEXT
```

```
\definefontfeature [...,1...] [...,2...] [...,3...]
                                                OPTIONAL
1  TEXT
2  IDENTIFIER
3  compose = no yes
    mode   = node base
    tlig    = no yes
    trep    = no yes
    script  = IDENTIFIER
    language = IDENTIFIER
    ..tag.. = no yes
```

```
\definefonthandling [...,1...] [...,2...] [...,3...]
1  IDENTIFIER
2  IDENTIFIER
3  type    = hanging hz spacing tag
    right  = NUMBER
    left   = NUMBER
    factor = NUMBER
    min    = NUMBER
    max    = NUMBER
    step   = NUMBER
```

```
\definefontsynonym [...,1...] [...,2...] [...,3...]
                                                OPTIONAL
1  TEXT
2  IDENTIFIER
3  fallbacks = IDENTIFIER
    features  = IDENTIFIER
    goodies   = IDENTIFIER
```

`\defineframed [.1.] [...,.2.,...]`
OPTIONAL

- 1 IDENTIFIER
- 2 *inherits from* \setupframedtexts

`\defineframedtext [.1.] [...,.2.,...]`
OPTIONAL

- 1 IDENTIFIER
- 2 *inherits from* \setupframedtexts

`\definehead [.1.] [.2.]`

- 1 IDENTIFIER
- 2 SECTION

`\defineindentedtext [.1.] [...,.2.,...]`

- 1 IDENTIFIER
- 2 *inherits from* \setupindentedtext

`\defineinteractionmenu [...,1...] [...,.2.,...]`
OPTIONAL

- 1 left right top bottom IDENTIFIER
- 2 *inherits from* \setupinteractionmenu

`\defineinteractionmenu [.1.] [.2.] [...,.3.,...]`
OPTIONAL OPTIONAL

- 1 left right top bottom IDENTIFIER
- 2 left right top bottom IDENTIFIER
- 3 *inherits from* \setupinteractionmenu

`\definelabel [.1.] [...,.2.,...]`

- 1 IDENTIFIER
- 2 text = TEXT
- location = inmargin intext
- way = bytext bycd:section
- blockway = yes no
- headstyle = normal bold slanted boldslanted type cap small... COMMAND
- headcolor = IDENTIFIER
- before = COMMAND
- after = COMMAND

`\definelist [.1.] [.2.] [...,.3.,...]`
OPTIONAL OPTIONAL

- 1 IDENTIFIER
- 2 IDENTIFIER
- 3 *inherits from* \setuplist

`\definelogo [.1.] [.2.] [...,3...] [...,.4.,...]`

- 1 IDENTIFIER
- 2 top header footer bottom
- 3 none page leftedge leftmargin left middle right rightmargin rightedge
- 4 command = COMMAND TEXT
- state = start stop

`\definemakeup [.1.] [...,.2.,...]`

- 1 IDENTIFIER
- 2 *inherits from* \setupmakeup

`\definemarking [.1.] [.2.]`
OPTIONAL

- 1 IDENTIFIER
- 2 IDENTIFIER

`\defineoutput [.1.] [...,2,...]`

1 IDENTIFIER
2 IDENTIFIER

`\defineoverlay [...,1,...] [...,2.]`

1 IDENTIFIER
2 COMMAND

`\definepalet [.1.] [...,2,...]`

1 IDENTIFIER
2 IDENTIFIER = IDENTIFIER

`\definepapersize [.1.] [...,2,...]`

1 IDENTIFIER
2 width = DIMENSION
height = DIMENSION
offset = DIMENSION
scale = NUMBER

`\defineparagraphs [.1.] [...,2,...]`

1 IDENTIFIER
2 n = NUMBER
rule = on off
height = fit DIMENSION
before = COMMAND
after = COMMAND
inner = COMMAND
distance = DIMENSION
tolerance = verystrict strict tolerant verytolerant stretch
align = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r

`\defineprofile [...,1,...] [...,2,...]`

1 IDENTIFIER
2 IDENTIFIER

`\defineprogram [.1.] [...,2.] [...,3.]`

1 IDENTIFIER
2 TEXT
3 TEXT

`\definereference [.1.] [...,2,...]`

1 IDENTIFIER
2 REFERENCE

`\definereferenceformat [.1.] [...,2,...]`

1 IDENTIFIER
2 left = TEXT
right = TEXT
text = TEXT
label = IDENTIFIER

`\definereferencelist [.1.] [...,2,...]`

1 IDENTIFIER
2 *inherits from* \setupreferencelist

`\defineregister [.1.] [...,2.]`

1 SINGULAR NAME
2 PLURAL NAME

`\definesection [...]`

* IDENTIFIER

`\definesectionblock [...]2,...]`

OPTIONAL

1 *inherits from* \setupsectionblock
2 *inherits from* \setupsectionblock

`\definesorting [...]2 [...]3`

OPTIONAL

1 SINGULAR NAME
2 PLURAL NAME
3 COMMAND

`\definestartstop [...]2,...]`

1 IDENTIFIER
2 before = COMMAND
after = COMMAND
style = normal bold slanted boldslanted type cap small... COMMAND
commands = COMMAND

`\definesubfield [...]1 [...]2 [...]3,...]`

1 IDENTIFIER
2 IDENTIFIER
3 IDENTIFIER

`\definesymbol [...]1 [...]2`

1 IDENTIFIER
2 TEXT

`\definesynonyms [...]1 [...]2 [...]3 [...]4`

OPTIONAL

1 SINGULAR NAME
2 PLURAL NAME
3 COMMAND
4 COMMAND

`\definetabletemplate [...]1 [...]2 [...]3 [...]4`

OPTIONAL OPTIONAL

1 IDENTIFIER
2 TEXT
3 TEXT
4 TEXT

`\definetabulate [...]1 [...]2 [...]3`

OPTIONAL

1 IDENTIFIER
2 IDENTIFIER
3 TEXT

`\definertext [...]1 [...]2 [...]3 [...]4 [...]5`

OPTIONAL OPTIONAL

1 IDENTIFIER
2 header footer
3 TEXT
4 TEXT
5 TEXT

`\definetype [...]1 [...]2,...]`

1 IDENTIFIER
2 *inherits from* \setuptype

`\definetypeface [.1.] [..2.] [..3.] [..4.] [..5.] [..6.]`
OPTIONAL OPTIONAL

1 TEXT
2 rm ss tt mm hw cg
3 IDENTIFIER
4 IDENTIFIER
5 IDENTIFIER
6 features = IDENTIFIER
rscale = NUMBER
encoding = IDENTIFIER
text = IDENTIFIER

`\definetyping [.1.] [..2.,...]`

1 inherits from \setuptyping
2 inherits from \setuptyping

`\defineversion [.1.] [..2,...]`

1 IDENTIFIER
2 NUMBER

`\DESCRIPTION {.1.} .2.`

1 CONTENT
2 NOTHING

`\determineheadnumber [.*.]`

* SECTION

`\determinelistcharacteristics [..1,...] [..2.,...]`
OPTIONAL

1 IDENTIFIER
2 inherits from \setuplist

`\disableinteractionmenu [.1.] [..2,...]`

1 left right top bottom IDENTIFIER
2 REFERENCE

`\emptylines [.*.]`

* NUMBER

`\ENUMERATION ...`

* NOTHING

`\externalfigure [.1.] [..2.,...]`
OPTIONAL

1 FILE
2 inherits from \setupexternalfigures

`\field [.*.]`

* IDENTIFIER

`\fieldstack [.1.] [..2,...] [..3.,...]`
OPTIONAL OPTIONAL

1 IDENTIFIER
2 IDENTIFIER
3 inherits from \setupfields

`\fillinfield [.1.] {.2.}`
OPTIONAL

1 TEXT
2 CONTENT

`\fillinline [...,1,...] 2.`
OPTIONAL
1 *inherits from* \setupfillinlines
2 NOTHING

`\fillinrules [...,1,...] {2.} {3.}`
OPTIONAL OPTIONAL
1 *inherits from* \setupfillinrules
2 CONTENT
3 CONTENT

`\fillintext [...,1,...] {2.} {3.}`
OPTIONAL OPTIONAL
1 *inherits from* \setupfillinrules
2 CONTENT
3 CONTENT

`\fitfield [...]`
* IDENTIFIER

`\fixedspaces`

`\followprofile {1.} [2.]`
1 CONTENT
2 TEXT

`\followprofileversion {1.} [2.] [3.]`
1 CONTENT
2 TEXT
3 IDENTIFIER

`\followversion {1.} [2.]`
1 CONTENT
2 TEXT

`\footnote [1.] {2.}`
OPTIONAL
1 REFERENCE
2 CONTENT

`\footnotetext [...]1 {2.}`
OPTIONAL
1 REFERENCE
2 CONTENT

`\forceblocks [...,1,...] [...,2,...]`
OPTIONAL
1 IDENTIFIER
2 IDENTIFIER

`\fraction {1.} {2.}`
1 CONTENT
2 CONTENT

`\framed [...,1,...] {2.}`
OPTIONAL
1 *inherits from* \setupframed
2 CONTENT

`\FRAMEDTEXT [...,*,...]`
OPTIONAL
* *inherits from* \setupframedtexts

\from [...]

* REFERENCE

\getbuffer [...]

* IDENTIFIER OPTIONAL

\getmarking [..¹] [..²]

1 IDENTIFIER
2 first last previous both all current

\godown [...]

* DIMENSION

\goto {..¹} {..²} [...,³...]

1 CONTENT
2 CONTENT
3 REFERENCE

\gotobox {..¹} [...,²...]

1 CONTENT
2 REFERENCE

\graycolor [...]

* TEXT

\grid [...,^{*}...]

* x = NUMBER
y = NUMBER
nx = NUMBER
ny = NUMBER
dx = NUMBER
dy = NUMBER
xstep = NUMBER
ystep = NUMBER
offset = yes no
factor = NUMBER
scale = NUMBER
unit = cm pt em mm ex es in
location = left middle

\hairline

\head [...,^{*}...]

OPTIONAL
* REFERENCE

\headnumber [...]

OPTIONAL
* SECTION

\headtext {..^{*}}

* CONTENT

\hideblocks [...,¹...] [...,²...]

OPTIONAL
1 IDENTIFIER
2 IDENTIFIER

`\high {...}`

* CONTENT

`\hl [...]`

* NUMBER

`\in {...} {...} [...]`

1 CONTENT
2 CONTENT
3 REFERENCE

`\INDENTATION ...`

* NOTHING

`\indenting [...,*,...]`

* never none not no yes always first next small medium big normal odd even DIMENSION

`\inframed [...,1,...] {...}`
OPTIONAL

1 inherits from \setupframed
2 CONTENT

`\ininner [...1] [...2] {...3}`
OPTIONAL OPTIONAL

1 + - low
2 REFERENCE
3 CONTENT

`\inleft [...1] [...2] {...3}`
OPTIONAL OPTIONAL

1 + - low
2 REFERENCE
3 CONTENT

`\inline [...]`

* REFERENCE

`\inmargin [...1] [...2] {...3}`
OPTIONAL OPTIONAL

1 + - low
2 REFERENCE
3 CONTENT

`\inotherrmargin [...1] [...2] {...3}`
OPTIONAL OPTIONAL

1 + - low
2 REFERENCE
3 CONTENT

`\inouter [...1] [...2] {...3}`
OPTIONAL OPTIONAL

1 + - low
2 REFERENCE
3 CONTENT

`\inright [...1] [...2] {...3}`
OPTIONAL OPTIONAL

1 + - low
2 REFERENCE
3 CONTENT

`\installlanguage [...]1 [...]2,...]`

1 IDENTIFIER
2 spacing = packed broad
lefthyphenmin = NUMBER
righthyphenmin = NUMBER
state = start stop
leftsentence = COMMAND
rightsentence = COMMAND
leftsubsentence = COMMAND
rightsubsentence = COMMAND
leftquote = COMMAND
rightquote = COMMAND
leftquotation = COMMAND
rightquotation = COMMAND
leftspeech = COMMAND
middlespeech = COMMAND
rightspeech = COMMAND
limittext = TEXT
date = TEXT
compoundhyphen = COMMAND
leftcompoundhyphen = COMMAND
rightcompoundhyphen = COMMAND
default = IDENTIFIER

`\interactionbar [...]*,...]`

** inherits from \setupinteractionbar*

`\interactionbuttons [...]1,... [...]2,...`
OPTIONAL

1 *inherits from \setupinteractionbar*
2 IDENTIFIER

`\item [...]*,...`

OPTIONAL
** REFERENCE*

`\items [...]1,... {... }2. ...}`

OPTIONAL
1 *inherits from \setupitems*
2 CONTENT

`\its [...]*,...`

OPTIONAL
** REFERENCE*

`\keepblocks [...]1,... [...]2,...`

OPTIONAL
1 IDENTIFIER
2 all IDENTIFIER

`\LABELING [...]*`

OPTIONAL
** REFERENCE*

`\labels [...]*`

** IDENTIFIER*

`\labeltext {...}`

** CONTENT*

`\language [...]*`

** nl fr en uk de es cz ..*

`\leftaligned {...}`

* CONTENT

`\listsymbol [.1.] {.2.}`

1 IDENTIFIER
2 CONTENT

`\loadSORTS`

`\loadSYNONYMS`

`\logfields`

`\lohi [.1.] {.2.} {.3.}`

OPTIONAL

1 low
2 CONTENT
3 CONTENT

`\low {.*.}`

* CONTENT

`\MONTH {.*.}`

* CONTENT

`\mainlanguage [.*.]`

* nl fr en uk de es cz ..

`\mapfontsize [.1.] [.2.]`

1 DIMENSION
2 DIMENSION

`\mar [...,1...] {.2.}`

OPTIONAL

1 REFERENCE
2 CONTENT

`\marginrule [.1.] {.2.}`

1 NUMBER
2 CONTENT

`\margintext [.1.] [.2.] {.3.}`

OPTIONAL OPTIONAL

1 + - low
2 REFERENCE
3 CONTENT

`\marking [.1.] {.2.}`

1 IDENTIFIER
2 CONTENT

`\markversion`

`\mathematics {.*.}`

* CONTENT

`\mediaeval {...}`

* CONTENT

`\midaligned {...}`

* CONTENT

`\mirror {...}`

* CONTENT

`\month {...}`

* CONTENT

`\moveongrid [...*,...]`

OPTIONAL

* standard top both bottom -top -both -bottom TEXT high middle low page broad fit depth line reset none
DIMENSION

`\name {...}`

* CONTENT

`\nextSECTION`

`\nocap {...}`

* CONTENT

`\noheaderandfooterlines`

`\noindenting`

`\nolist {...}`

* CONTENT

`\nomarking {...}`

* CONTENT

`\nomoreblocks`

`\nomorefiles`

`\nop`

`\nospace`

`\note [...]`

* REFERENCE

`\notopandbottomlines`

`\nowhitespace`

`\numbers {...}`

* CONTENT

`\overbar {...}`

* CONTENT

`\overbars {...} {...}`

* WORD

`\overstrike {...}`

* CONTENT

`\overstrikes {...} {...}`

* WORD

`\packed`

`\page [...]*...]`

* `yes` `makeup` `no` `preference` `bigpreference` `left` `right` `disable` `last` `quadruple` `even` `odd` `blank` `empty` `reset` `start` `stop`

`\pagereference [...]`

* REFERENCE

`\PARAGRAPH`

`\part [...,1...] {...2}`
OPTIONAL

1 REFERENCE

2 CONTENT

`\periods [...]`

* NUMBER

`\placebookmarks [...,1...] [...,2...] [...,3,...]`
OPTIONAL OPTIONAL OPTIONAL

1 IDENTIFIER

2 IDENTIFIER `all`

3 `force = yes no`

`\placecombinedlist [...1] [...,2,...]`
OPTIONAL OPTIONAL

1 IDENTIFIER

2 `inherits from \setupcombinedlist`

`\placeCOMBINEDLIST [...1] [...,2,...]`
OPTIONAL OPTIONAL

1 IDENTIFIER

2 `inherits from \setupcombinedlist`

`\placeFLOAT [...1] [...,2...] {...3} {...4}`
OPTIONAL OPTIONAL

1 `left` `right` `here` `top` `bottom` `inleft` `inright` `inmargin` `margin` `leftmargin` `rightmargin` `leftedge` `rightedge`
`innermargin` `outermargin` `inneredge` `outeredge` `inner` `outer` `line` `high` `low` `fit` `page` `leftpage` `rightpage` `opposite`
`always` `auto` `force` `tall` `reset` `line` `height` `depth` `split` `90` `180` `270`

2 REFERENCE

3 CONTENT

4 CONTENT

`\placefootnotes [...,*,...]`

OPTIONAL

* *inherits from* `\setupfootnotes`

`\placeformula [...1,...] {...2.} $$3..$$`

OPTIONAL

OPTIONAL

- 1 REFERENCE
- 2 CONTENT
- 3 DISPLAY MATH

`\placelegend {...1.} {...2.}`

- 1 CONTENT
- 2 CONTENT

`\placelist [...1,...] [...,2,...]`

OPTIONAL

- 1 IDENTIFIER
- 2 *inherits from* `\setuplist`

`\placelistofFLOATS`

`\placelistofSORTS`

`\placelistofSYNONYMS`

`\placelocalfootnotes [...,*,...]`

OPTIONAL

* *inherits from* `\setupfootnotes`

`\placelogos [...,*,...]`

OPTIONAL

* IDENTIFIER

`\placeongrid [...1.] {...2.}`

OPTIONAL

- 1 *inherits from* `\moveongrid`
- 2 CONTENT

`\placeontopofeachother {...1.} {...2.}`

- 1 CONTENT
- 2 CONTENT

`\placereferencelist [...,*,...]`

* IDENTIFIER

`\placeregister [...1.] [...,2,...]`

OPTIONAL

- 1 IDENTIFIER
- 2 *inherits from* `\setupregister`

`\placeREGISTER [...,*,...]`

OPTIONAL

* *inherits from* `\setupregister`

`\placesidebyside {...1.} {...2.}`

- 1 CONTENT
- 2 CONTENT

`\REGISTER` [¹...] {..²..+..}

OPTIONAL

- 1 TEXT
- 2 INDEX

`\reserveFLOAT` [..₁..¹...] [²...] [...³...] {..⁴..}

OPTIONAL

OPTIONAL

OPTIONAL

- 1 height = DIMENSION
width = DIMENSION
frame = on off
- 2 TEXT
- 3 REFERENCE
- 4 CONTENT

`\reset` [...,*...]

- * IDENTIFIER

`\resetmarking` [...]

- * IDENTIFIER

`\resettextcontent` [¹...] [²...] [³...]

OPTIONAL

- 1 top header text footer bottom
- 2 text margin edge
- 3 lefttext middletext righttext

`\rightaligned` {...}

- * CONTENT

`\romannumerals` {...}

- * CONTENT

`\rotate` [..₁..¹...] {..²..}

OPTIONAL

- 1 *inherits from* \setuprotate
- 2 CONTENT

`\scale` [..₁..¹...] {..²..}

OPTIONAL

- 1 sx = NUMBER
sy = NUMBER
- 2 CONTENT

`\screen`

`\section` [...,¹...] {..²..}

OPTIONAL

- 1 REFERENCE
- 2 CONTENT

`\seeREGISTER` [¹...] {..²..} {..³..+..}

OPTIONAL

- 1 TEXT
- 2 CONTENT
- 3 INDEX

`\selectblocks` [...,¹...] [...,²...] [₃...]

OPTIONAL

OPTIONAL

- 1 IDENTIFIER
- 2 IDENTIFIER
- 3 criterium = all SECTION

\selectpaper [...,*,...]

* family = 1 2

\selectversion

\settextcontent [¹.] [².] [³.] [⁴.] [⁵.]
OPTIONAL OPTIONAL OPTIONAL

1 top header text footer bottom
2 text margin edge
3 TEXT SECTION date MARK pagenumber
4 TEXT SECTION date MARK pagenumber
5 TEXT SECTION date MARK pagenumber

\setupalign [...,*,...]

* width left right middle inner outer wide broad height bottom line reset hanging nothanging hyphenated
nothyphenated lesshyphenation morehyphenation new old normal yes no flushleft flushright flushouter flushinner
center hz nohz spacing nospacing tolerant verytolerant stretch lefttoright righttoleft

\setuparranging [...,*,...]

* disable 2*16 2*8 2*4 2*2 2**2 2*2*4 2*4*2 2UP 2DOWN 2SIDE 2TOP mirrored rotated doublesided negative
background 90 180 270

\setupbackground [...,*,...]

* leftoffset = DIMENSION
rightoffset = DIMENSION
topoffset = DIMENSION
bottomoffset = DIMENSION
before = COMMAND
after = COMMAND
state = start stop
inherits from \setupframed

\setupbackgrounds [¹.] [...,²,...] [...,³,...]
OPTIONAL OPTIONAL

1 top header TEXT footer bottom page paper leftpage rightpage
2 leftedge leftmargin TEXT rightmargin rightedge
3 state = start stop cd:repeat
inherits from \setupframed

\setupblackrules [...,*,...]

* width = DIMENSION max
height = DIMENSION max
depth = DIMENSION max
alternative = a b
distance = DIMENSION
n = NUMBER
color = IDENTIFIER

\setupblank [...]

OPTIONAL
* normal default standard line halfline DIMENSION big medium small fixed flexible global unknown

\setupblock [...,¹,...] [...,²,...]

1 IDENTIFIER
2 before = COMMAND
after = COMMAND
inner = COMMAND
style = normal bold slanted boldslanted type cap small... COMMAND
file = FILE

\setupbodyfont [...,*,...]

* IDENTIFIER serif regular roman sans support sansserif mono type teletype handwritten calligraphic 5pt ... 12pt

```

1 inherits from \definebodyfontenvironment
2 inherits from \definebodyfontenvironment
3 inherits from \definebodyfontenvironment

```

```
1 inherits from \setupheader
2 inherits from \setupheader
```

```

1  text margin edge
2  TEXT SECTION date MARK pagenumber
3  TEXT SECTION date MARK pagenumber

```

| | | | |
|---|------------|---|---------|
| 1 | IDENTIFIER | | |
| 2 | paragraph | = | NUMBER |
| | before | = | COMMAND |
| | after | = | COMMAND |

```
* state = start stop
  inherits from \setupframed
```

```
*  title  =  yes  no
   sc     =  yes  no
```

```
1 IDENTIFIER
2 inherits from \setupcaptions
```

```
* location = top bottom none high low middle left middle right lefthanging righthanging leftmargin
            rightmargin innermargin outermargin
width      = fit broad max DIMENSION
minwidth   = fit DIMENSION
headstyle  = normal bold slanted boldslanted type cap small... COMMAND
style      = normal bold slanted boldslanted type cap small... COMMAND
number     = yes no none
inbetween  = COMMAND
align      = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
conversion = numbers characters Characters romannumerals Romannumerals
way        = bytext bycd:section
separator  = TEXT
stopper    = TEXT
command    = COMMAND
distance   = DIMENSION
```

`\setupclipping [...,.*,...]`

```
* state      = start stop
n            = NUMBER
nx           = NUMBER
ny           = NUMBER
x            = NUMBER
y            = NUMBER
sx           = NUMBER
sy           = NUMBER
width        = DIMENSION
height       = DIMENSION
hoffset      = DIMENSION
voffset      = DIMENSION
offset       = DIMENSION
leftoffset   = DIMENSION
rightoffset  = DIMENSION
topoffset    = DIMENSION
bottomoffset = DIMENSION
mp           = IDENTIFIER
```

`\setupcolor [...]`

```
* IDENTIFIER
```

`\setupcolors [...,.*,...]`

```
* state      = start stop global local
conversion   = yes no always never
reduction    = yes no
rgb          = yes no
cmyk         = yes no
mpcmyk       = yes no
mpspot       = yes no
factor       = yes no
textcolor    = IDENTIFIER
split        = c m y k p s no IDENTIFIER
criterium    = all none
intent       = none overprint knockout
```

`\setupcolumns [...,.*,...]`

OPTIONAL

```
* n          = NUMBER
ntop         = NUMBER
rule         = on off
height       = DIMENSION
tolerance    = verystRICT strict tolerant verytolerant stretch
distance     = DIMENSION
balance      = yes no
align        = text inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
blank        = fixed halflIne line flexible big medium small
option       = background
direction    = left right
inherits from \setupframed
```

`\setupcombinations [...,.*,...]`

```
* before     = COMMAND
inbetween    = COMMAND
after        = COMMAND
distance     = DIMENSION
height       = DIMENSION fit
width        = DIMENSION fit
location     = top middle bottom left right
align        = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
style        = normal bold slanted boldslanted type cap small... COMMAND
color        = IDENTIFIER
```

`\setupcombinedlist [...,1...] [...,.*,2,...]`

```
1 IDENTIFIER
2 level = 1 2 3 4 SECTION current
inherits from \setuplist
```

`\setupcomment [...,*,...]`

* state = start stop
width = DIMENSION
height = DIMENSION
color = IDENTIFIER
title = TEXT
space = yes no
symbol = normal New Balloon Addition Help Paragraph Key IDENTIFIER
option = max buffer
margin = DIMENSION
distance = DIMENSION

`\setupdescriptions [...,1,...] [...,2,...]`
OPTIONAL

1 IDENTIFIER
2 style = normal bold slanted boldslanted type cap small... COMMAND
color = IDENTIFIER
width = fit broad DIMENSION
distance = DIMENSION
sample = TEXT
text = TEXT
closesymbol = TEXT
closecommand = \...#1
closesymbol = TEXT
titleleft = TEXT
titleright = TEXT
titledistance = DIMENSION
titlestyle = normal bold slanted boldslanted type cap small... COMMAND
titlecolor = IDENTIFIER
align = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
margin = standard yes no DIMENSION
location = left right top serried inmargin inleft inright hanging
headstyle = normal bold slanted boldslanted type cap small... COMMAND
headcolor = IDENTIFIER
headcommand = COMMAND
hang = fit broad NUMBER
before = COMMAND
inbetween = COMMAND
after = COMMAND
indentnext = yes no
indenting = never none not no yes always first next small medium big normal odd even DIMENSION
command = COMMAND
display = yes no

`\setupenumerations [...,1,...] [...,2,...]`
OPTIONAL

1 IDENTIFIER
2 *inherits from* \setupdescriptions

`\setupexternalfigures [.*.]`

```
* scale      = NUMBER
yscale      = NUMBER
yscale      = NUMBER
factor      = max fit broad
wfactor     = NUMBER max broad fit
hfactor     = NUMBER max broad fit
width       = DIMENSION
height      = DIMENSION
frame       = on off
preset      = yes no
display     = FILE
preview     = yes no
repeat      = yes no
object      = yes no
type        = eps mps pdf tif png jpg mov cd:tex
method      = eps mps pdf tif png jpg mov cd:tex
option      = frame empty test
frames      = on off
ymax        = NUMBER
xmax        = NUMBER
directory   = TEXT
location    = local global default none
maxwidth    = DIMENSION
maxheight   = DIMENSION
conversion  = TEXT
prefix      = TEXT
interaction = yes no
```

`\setupfield [..1..] [..2..] [..3..] [..4..] [..5..]`

```
1 IDENTIFIER
2 label horizontal vertical frame
3 inherits from \setupfields
4
5
```

`\setupfields [..1..] [..2..] [..3..] [..4..]`

```
1 reset label horizontal vertical frame
2 n      = NUMBER
distance = DIMENSION
before   = COMMAND
after    = COMMAND
inbetween = COMMAND
color    = IDENTIFIER
style    = normal bold slanted boldslanted type cap small... COMMAND
align    = inner outer left right flushleft flushright middle center normal no yes broad last r2l
         12r
option   = readonly required protected sorted unavailable hidden printable
clickin  = REFERENCE
clickout = REFERENCE
regionin = REFERENCE
regionout = REFERENCE
afterkey = REFERENCE
format   = REFERENCE
validate = REFERENCE
calculate = REFERENCE
fieldoffset = DIMENSION
fieldframecolor = IDENTIFIER
fieldbackgroundcolor = IDENTIFIER
inherits from \setupframed
3 inherits from \setupfields
4 inherits from \setupfields
```

`\setupfillinlines [..*..]`

```
* width  = DIMENSION
margin  = DIMENSION
distance = DIMENSION
before  = COMMAND
after   = COMMAND
```

`\setupfillinrules [...,*.,...]`

```
* width           = fit broad DIMENSION
distance          = DIMENSION
before           = COMMAND
after            = COMMAND
style            = normal bold slanted boldslanted type cap small... COMMAND
n                = NUMBER
interlinespace    = small medium big
separator         = TEXT
```

`\setupfloat [...,1.,2.,...]`

```
1 IDENTIFIER
2 height          = DIMENSION
width            = DIMENSION
maxheight        = DIMENSION
maxwidth         = DIMENSION
minwidth         = DIMENSION
default          = IDENTIFIER
pageboundaries   = LIST
leftmargindistance = DIMENSION
rightmargindistance = DIMENSION
location         = left middle right
inherits from \setupframed
```

`\setupfloats [...,*.,...]`

```
* location        = left right middle
width            = fit DIMENSION
before           = COMMAND
after            = COMMAND
margin           = DIMENSION
spacebefore      = small medium big none
spaceafter       = small medium big none
sidespacebefore  = small medium big none
sidespaceafter   = small medium big none
indentnext       = yes no
ntop             = NUMBER
nbottom          = NUMBER
nlines           = NUMBER
default          = IDENTIFIER
tolerance        = 0 1 2
leftmargindistance = DIMENSION
rightmargindistance = DIMENSION
sidealign        = normal line
numbering        = yes nocheck
inherits from \setupframed
```

`\setupfloatsplitting [...,*.,...]`

```
* conversion = numbers characters Characters romannumerals Romannumerals
lines       = NUMBER
```

`\setupfonthandling [...,1.,2.]`

```
1 IDENTIFIER
2 inherits from \definefonthandling
```

`\setupfontsynonym [...,1.,2.]`

```
1 IDENTIFIER
2 inherits from \definefontsynonym
```

`\setupfooter [...,1.,2.,...]`

```
OPTIONAL
1 inherits from \setupheader
2 inherits from \setupheader
```

`\setupfootertexts [...,1.,2.,3.]`

```
OPTIONAL
1 text margin edge
2 TEXT SECTION date MARK pagenumber
3 TEXT SECTION date MARK pagenumber
```

`\setupfootnotedefinition [...,*,...]`

* *inherits from* `\setupdescriptions`

`\setupfootnotes [...,*,...]`

* `conversion` = numbers characters Characters romannumerals Romannumerals
 `way` = bytext bycd:section
 `location` = page TEXT columns firstcolumn lastcolumn high none
 `rule` = on off
 `before` = COMMAND
 `after` = COMMAND
 `width` = DIMENSION
 `height` = DIMENSION
 `bodyfont` = 5pt ... 12pt small big
 `style` = normal bold slanted boldslanted type cap small... COMMAND
 `distance` = DIMENSION
 `columndistance` = DIMENSION
 `margindistance` = DIMENSION
 `n` = NUMBER
 `numbercommand` = \...#1
 `textcommand` = \...#1
 `split` = tolerant strict verystRICT NUMBER
 `textstyle` = normal bold slanted boldslanted type cap small... COMMAND
 `textcolor` = IDENTIFIER
 `interaction` = yes no
 `paragraph` = yes no
 `factor` = NUMBER
 inherits from `\setupframed`

`\setupforms [...,*,...]`

* `method` = HTML FDF

`\setupformulas [...,*,...]`

* `location` = left right
 `left` = TEXT
 `right` = TEXT
 `align` = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
 `option` = middle
 `strut` = yes no
 `distance` = DIMENSION
 `margin` = DIMENSION standard yes no
 `align` = flushleft flushright middle center
 `leftmargin` = DIMENSION
 `rightmargin` = DIMENSION
 `indentnext` = yes no
 `alternative` = IDENTIFIER
 `spacebefore` = DIMENSION
 `after` = DIMENSION
 `separator` = TEXT
 `conversion` = numbers characters Characters romannumerals Romannumerals TEXT

`\setupframed` [¹...] [₂...₂...]

OPTIONAL

```
1 IDENTIFIER
2 height          = fit broad DIMENSION
width            = fit broad fixed local DIMENSION
autowidth        = yes no force
offset           = none overlay default DIMENSION
location         = depth hanging high lohi low top middle bottom keep
option           = none empty
strut            = yes no global local
align            = inner outer left right flushleft flushright middle center normal no yes broad last r2l
                  12r
bottom           = COMMAND
top              = COMMAND
frame            = on off none overlay
topframe         = on off
bottomframe      = on off
leftframe        = on off
rightframe       = on off
frameoffset      = DIMENSION
framedepth       = DIMENSION
framecorner      = round rectangular
frameradius      = DIMENSION
framecolor       = IDENTIFIER
background       = screen color none foreground IDENTIFIER
backgroundscreen = NUMBER
backgroundcolor  = IDENTIFIER
backgroundoffset = frame DIMENSION
backgrounddepth  = DIMENSION
backgroundcorner = round rectangular
backgroundradius = DIMENSION
depth            = DIMENSION
corner           = round rectangular
radius           = DIMENSION
empty            = yes no
foregroundcolor  = IDENTIFIER
foregroundstyle   = normal bold slanted boldslanted type cap small... COMMAND
rulethickness    = DIMENSION
```

`\setupframedtexts` [¹...] [₂...₂...]

OPTIONAL

```
1 IDENTIFIER
2 bodyfont        = 5pt ... 12pt small big
style            = normal bold slanted boldslanted type cap small... COMMAND
left             = COMMAND
right            = COMMAND
before           = COMMAND
after            = COMMAND
inner            = COMMAND
linecorrection   = on off
depthcorrection  = on off
margin           = standard yes no
location         = left right middle none
indenting        = never none not no yes always first next small medium big normal odd even DIMENSION
inherits from \setupframed
```


`\setuphead [...1,...] [...,2_,...]`

```
1 SECTION
2 style = normal bold slanted boldslanted type cap small... COMMAND
  textstyle = normal bold slanted boldslanted type cap small... COMMAND
  numberstyle = normal bold slanted boldslanted type cap small... COMMAND
  color = IDENTIFIER
  textcolor = IDENTIFIER
  numbercolor = IDENTIFIER
  number = yes no
  ownnumber = yes no
  page = left right yes
  continue = yes no
  header = none empty high nomarking
  text = none empty high nomarking
  footer = none empty high nomarking
  before = COMMAND
  inbetween = COMMAND
  after = COMMAND
  alternative = normal inmargin middle TEXT
  hang = none broad fit line NUMBER
  command = \...#1#2
  numbercommand = \...#1
  textcommand = \...#1
  deepnumbercommand = \...#1
  deeptextcommand = \...#1
  prefix = + - TEXT
  placehead = yes no empty
  incrementnumber = yes no LIST FILE
  resetnumber = yes no
  file = IDENTIFIER
  expansion = yes no command
  margintext = yes no
  interaction = list none
  inherits from \setupheads
```

`\setupheader [...1,...] [...,2_,...]`

OPTIONAL

```
1 TEXT margin edge
2 state = normal stop start empty high none nomarking IDENTIFIER
  strut = yes no
  style = normal bold slanted boldslanted type cap small... COMMAND
  leftstyle = normal bold slanted boldslanted type cap small... COMMAND
  rightstyle = normal bold slanted boldslanted type cap small... COMMAND
  leftwidth = DIMENSION
  rightwidth = DIMENSION
  before = COMMAND
  after = COMMAND
```

`\setupheadertexts [...1,...] [...2,...] [...3,...]`

OPTIONAL

```
1 text margin edge
2 TEXT SECTION date MARK pagenumber
3 TEXT SECTION date MARK pagenumber
```

`\setupheadnumber [...1,...] [...2,...]`

```
1 SECTION
2 NUMBER +cd:number -cd:number
```

`\setupheads [...,*_,...]`

```
* sectionnumber = yes NUMBER no
  alternative = normal margin middle TEXT paragraph
  separator = TEXT
  stopper = TEXT
  align = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
  aligntitle = yes float no
  tolerance = verystrict strict tolerant verytolerant stretch
  indentnext = yes no
  command = \...#1#2
  margin = DIMENSION
```

`\setupheadtext [.1.] [.2.]`

OPTIONAL

1 nl fr en uk de es cz ..
2 IDENTIFIER = TEXT

`\setuphyphenmark [.*.]`

* sign = -- --- - ~ () = /

`\setupindentedtext [...,1...] [...,2...]`

OPTIONAL

1 IDENTIFIER
2 style = normal bold slanted boldslanted type cap small... COMMAND
headstyle = normal bold slanted boldslanted type cap small... COMMAND
width = fit DIMENSION
text = TEXT
sample = TEXT
before = COMMAND
after = COMMAND
distance = DIMENSION
separator = TEXT

`\setupindenting [...,*...]`

* never none not no yes always first next small medium big normal odd even DIMENSION

`\setupinmargin [.1.] [...,2...]`

OPTIONAL

1 left right NUMBER
2 location = left right both
style = normal bold slanted boldslanted type cap small... COMMAND
before = COMMAND
after = COMMAND
align = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
line = NUMBER
distance = DIMENSION
separator = TEXT
width = DIMENSION
distance = DIMENSION
stack = yes no
inherits from \setupframed

`\setupinteraction [...,*...]`

* state = start stop
menu = on off
page = yes no
click = yes no
split = yes no
display = new
openaction = REFERENCE
closeaction = REFERENCE
openpageaction = REFERENCE
closepageaction = REFERENCE
calculate = IDENTIFIER
strut = yes no
width = DIMENSION
height = DIMENSION
depth = DIMENSION
style = normal bold slanted boldslanted type cap small... COMMAND
color = IDENTIFIER
contrastcolor = IDENTIFIER
symbolset = IDENTIFIER
title = TEXT
subtitle = TEXT
author = TEXT
date = TEXT
keyword = TEXT
fieldlayer = auto IDENTIFIER

`\setupinteractionbar [...,.*,...]`

```
* state      = start stop
  alternative = a b c d e f g
  symbol      = yes no
  width       = DIMENSION height fit
  height      = DIMENSION height fit
  depth       = DIMENSION
  color       = IDENTIFIER
  step        = NUMBER small medium big
  inherits from \setupframed
```

`\setupinteractionmenu [...,1...] [...,2,...]`

```
1 IDENTIFIER
2 before      = COMMAND
  after       = COMMAND
  inbetween   = COMMAND
  left        = COMMAND
  right       = COMMAND
  middle      = COMMAND
  state       = start stop none local
  style       = normal bold slanted boldslanted type cap small... COMMAND
  color       = IDENTIFIER
  contrastcolor = IDENTIFIER
  distance    = overlay DIMENSION
  samepage    = yes empty no none
  unknownreference = yes empty no none
  leftoffset  = DIMENSION
  rightoffset = DIMENSION
  topoffset   = DIMENSION
  bottomoffset = DIMENSION
  position    = yes no
  inherits from \setupframed
```

`\setupinteractionscreen [...,.*,...]`

```
* width      = DIMENSION fit max
  height     = DIMENSION fit max
  backspace  = DIMENSION
  topspace   = DIMENSION
  horoffset  = DIMENSION
  veroffset  = DIMENSION
  option     = max fit doublesided singlesided auto none bookmark
  delay      = NUMBER none
```

`\setupinterlinespace [...]`

```
* reset OPTIONAL small medium auto big on off
```

`\setupinterlinespace [...,.*,...]`

```
* height = NUMBER
  depth  = NUMBER
  line    = DIMENSION
  top     = NUMBER
  bottom  = NUMBER
```

`\setupitemgroup` [¹.₁.] [².₂.] [³...;³...] [⁴...;₄...]

OPTIONAL OPTIONAL OPTIONAL

```
1 IDENTIFIER
2 NUMBER each
3 standard broad serried packed unpacked nowhite before after stopper joinedup atmargin inmargin autointro loose
  repeat SECTION paragraph intext random reverse
4 margin      = no standard DIMENSION
  leftmargin  = no standard DIMENSION
  rightmargin = no standard DIMENSION
  width       = DIMENSION
  distance    = DIMENSION
  step        = DIMENSION
  factor      = NUMBER
  items       = NUMBER
  start       = NUMBER
  before      = COMMAND
  inbetween   = COMMAND
  after       = COMMAND
  left        = TEXT
  right       = TEXT
  beforehead  = COMMAND
  afterhead   = COMMAND
  headstyle   = normal bold slanted boldslanted type cap small... COMMAND
  marstyle    = normal bold slanted boldslanted type cap small... COMMAND
  symstyle    = normal bold slanted boldslanted type cap small... COMMAND
  stopper     = TEXT
  n           = NUMBER
  symbol      = NUMBER
  align       = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
  symalign    = left right flushleft flushright middle center
  indentnext  = yes no
  textdistance = none big medium small
```

`\setupitems` [₁...;₂...]

```
* location  = left right inmargin top bottom
  symbol    = 1 2 ... n a ... TEXT none
  width     = DIMENSION
  n         = NUMBER unknown
  before    = COMMAND
  inbetween = COMMAND
  align     = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
  after     = COMMAND
```

`\setuplabeltext` [¹.₁.] [₂...]

OPTIONAL

```
1 nl fr en uk de es cz ..
2 IDENTIFIER = TEXT
```

`\setuplanguage` [¹.₁.] [₂...;₃...]

```
1 nl fr en uk de es cz ..
2 inherits from \installlanguage
```

`\setuplayout [...,*,...]`

```
*   width           = DIMENSION fit middle
    height          = DIMENSION fit middle
    backspace       = DIMENSION
    topspace        = DIMENSION
    margin           = DIMENSION
    leftmargin       = DIMENSION
    rightmargin      = DIMENSION
    header           = DIMENSION
    footer           = DIMENSION
    top              = DIMENSION
    bottom           = DIMENSION
    leftedge         = DIMENSION
    rightedge        = DIMENSION
    headerdistance   = DIMENSION
    footerdistance   = DIMENSION
    topdistance      = DIMENSION
    bottomdistance   = DIMENSION
    leftmargindistance = DIMENSION
    rightmargindistance = DIMENSION
    lefttedgedistance = DIMENSION
    righttedgedistance = DIMENSION
    horoffset        = DIMENSION
    veroffset        = DIMENSION
    style            = normal bold slanted boldslanted type cap small... COMMAND
    color            = IDENTIFIER
    marking          = on off color screen TEXT page
    location         = left middle right bottom top singlesided doublesided
    scale            = DIMENSION
    nx               = NUMBER
    ny               = NUMBER
    dx               = DIMENSION
    dy               = DIMENSION
    lines            = NUMBER
    columns           = NUMBER
    columndistance   = DIMENSION
    grid             = yes no
    bottomspace      = DIMENSION
    cutspace         = DIMENSION
    textdistance     = DIMENSION
    textwidth        = NUMBER
    textmargin       = DIMENSION
    clipoffset       = DIMENSION
    page             = IDENTIFIER
    paper            = IDENTIFIER
```

`\setuplegend [...,*,...]`

```
*   n               = NUMBER
    distance         = DIMENSION
    inbetween        = COMMAND
    width            = DIMENSION
    height           = DIMENSION
    location         = right bottom
    bodyfont         = 5pt ... 12pt small big
```

`\setuplinenumbering [...,*,...]`

```
*   conversion      = numbers characters Characters romannumerals Romannumerals TEXT
    start            = NUMBER
    step             = NUMBER
    width            = DIMENSION
    location         = middle left margin inmargin inleft right inright inner outer text begin end
    style            = normal bold slanted boldslanted type cap small... COMMAND
    prefix           = TEXT
    referencing      = on off
```

`\setuplines [...,*,...]`

```
*   before          = COMMAND
    after            = COMMAND
    inbetween        = COMMAND
    indenting        = never none not no yes always first next small medium big normal odd even DIMENSION
    space            = yes no
    option           = packed
```

`\setuplinewidth [...]`

* DIMENSION

`\setuplist [...1,...] [...,2,...]`

```
1 IDENTIFIER
2 state           = start stop
  alternative     = a b c ... none command
  coupling        = on off
  criterium       = SECTION local previous current here intro all
  extras          = LIST
  style           = normal bold slanted boldslanted type cap small... COMMAND
  numberstyle     = normal bold slanted boldslanted type cap small... COMMAND
  textstyle       = normal bold slanted boldslanted type cap small... COMMAND
  pagestyle       = normal bold slanted boldslanted type cap small... COMMAND
  color           = IDENTIFIER
  command         = \...#1#2#3
  numbercommand   = \...#1
  textcommand     = \...#1
  pagecommand     = \...#1
  interaction      = sectionnumber text pagenumber all none
  before          = COMMAND
  after           = COMMAND
  inbetween       = COMMAND
  left            = TEXT
  right           = TEXT
  label           = yes no
  prefix          = yes no none
  pagenumber      = yes no
  headnumber      = yes no
  cd:sectionnumber = yes no
  aligntitle      = yes no
  margin          = DIMENSION
  width           = DIMENSION fit
  height          = DIMENSION fit broad
  depth           = DIMENSION fit broad
  distance        = DIMENSION
  separator       = TEXT
  stopper         = TEXT
  symbol          = none 1 2 3 ...
  expansion       = yes no command
  maxwidth        = DIMENSION
  order           = command all normal
  inherits from \setupframed
```

`\setuplistalternative [...1,] [...,2,...]`

```
1 a b c
2 command = COMMAND
  width   = DIMENSION
  stretch = DIMENSION
  distance = DIMENSION
```

`\setupmakeup [...1,] [...,2,...]`

```
1 IDENTIFIER
2 width      = DIMENSION
  height     = DIMENSION
  page       = left yes right
  commands   = COMMAND
  doublesided = yes no empty
  headerstate = normal stop start empty none nomarking
  footerstate = normal stop start empty none nomarking
  textstate   = normal stop start empty none nomarking
  topstate    = stop start
  bottomstate = stop start
  pagestate   = stop start
  color       = IDENTIFIER
```

`\setupmarginblocks [...,*,...]`

```
* location = inmargin left middle right
  style    = normal bold slanted boldslanted type cap small... COMMAND
  width     = DIMENSION
  align     = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
  top       = COMMAND
  inbetween = COMMAND
  bottom    = COMMAND
  left      = COMMAND
  right     = COMMAND
  before    = COMMAND
  after     = COMMAND
```

`\setupmarginrules [...*.]`

```
* level      = NUMBER
  rulethickness = DIMENSION
```

`\setupmarking [...1.] [...2.]`

```
1 IDENTIFIER
2 state      = start stop
  separator  = COMMAND
  expansion  = yes no
```

`\setupnarrower [...,*,...]`

```
* left  = DIMENSION
  right = DIMENSION
  middle = DIMENSION
```

`\setupnumbering [...,*,...]`

```
* way = bytext bycd:section
  state = start stop
```

`\setupoppositeplacing [...*.]`

```
* state      = start stop
  before     = COMMAND
  inbetween  = COMMAND
  after      = COMMAND
```

`\setupoutput [...*,...]`

```
* IDENTIFIER
```

`\setuppagenumber [...,*,...]`

```
* number = NUMBER
  state  = start stop keep
```

`\setuppagenumbering [...,*,...]`

```
* alternative      = singlesided doublesided
  location          = header footer left right middle margin marginedge inleft inright
  conversion        = numbers characters Characters romannumerals Romannumerals
  style             = normal bold slanted boldslanted type cap small... COMMAND
  left              = TEXT
  right             = TEXT
  way               = bytext bycd:section
  text              = TEXT
  numberseparator   = TEXT
  textseparator     = TEXT
  cd:sectionnumber  = yes no
  separator         = TEXT
  strut             = yes no
  state             = start stop
  width             = DIMENSION
  command           = \...#1
  page              = last yes no
```

\setuppagetransitions [...,*,...]

OPTIONAL

* reset NUMBER

\setuppalet [...]

* IDENTIFIER

\setuppaper [...,*,...]

* paper = IDENTIFIER
page = IDENTIFIER
nx = NUMBER
ny = NUMBER
width = DIMENSION
height = DIMENSION
topspace = DIMENSION
backspace = DIMENSION
option = max fit
method = normal IDENTIFIER

\setuppapersize [...,¹...] [...,²...]

OPTIONAL

1 A3 A4 A5 A6 letter ... CD IDENTIFIER landscape mirrored rotated 90 180 270
2 negative *inherits from* \setuppapersize

\setupparagraphnumbering [...,*,...]

* state = start stop reset line
style = normal bold slanted boldslanted type cap small... COMMAND
distance = DIMENSION

\setupparagraphs [...,¹...] [...,²...] [...,³,...]

OPTIONAL

1 IDENTIFIER
2 NUMBER each
3 style = normal bold slanted boldslanted type cap small... COMMAND
width = DIMENSION
height = DIMENSION
align = inner outer left right flushleft flushright middle center normal no yes broad last r2l l2r
tolerance = verystrict strict tolerant verytolerant stretch
distance = DIMENSION
before = COMMAND
after = COMMAND
inner = COMMAND
command = COMMAND
rule = on off

\setuppositioning [...,*,...]

* state = start overlay
unit = cm pt em mm ex es in
factor = NUMBER
scale = NUMBER
offset = yes no
xstep = absolute relative
ystep = absolute relative

\setupprofiles [...,*,...]

* option = test

\setupprograms [...,*,...]

* directory = TEXT

\setuppuplications [...,*,...]

* alternative = apa normal
inherits from \setupenumerations

\setupquote [...,*,...]

* before = COMMAND
after = COMMAND
style = normal bold slanted boldslanted type cap small... COMMAND
color = IDENTIFIER
location = TEXT margin

\setupreferencelist [...,¹...₂,...]
OPTIONAL

1 IDENTIFIER
2 state = start stop
criterium = SECTION local previous all
command = COMMAND
before = COMMAND
after = COMMAND

\setupreferencing [...,*,...]

* state = start stop
cd:sectionnumber = yes no
prefix = + - TEXT
interaction = label TEXT all symbol
width = DIMENSION
left = COMMAND
right = COMMAND
convertfile = yes no small big
separator = TEXT
autofile = yes no page
global = yes no
export = yes no

\setupregister [...,¹...₂...³...]
OPTIONAL

1 SINGULAR NAME
2 IDENTIFIER
3 n = NUMBER
balance = yes no
align = inner outer left right flushleft flushright middle center normal no yes broad last r2l
l2r
style = normal bold slanted boldslanted type cap small... COMMAND
pagestyle = normal bold slanted boldslanted type cap small... COMMAND
textstyle = normal bold slanted boldslanted type cap small... COMMAND
indicator = yes no
coupling = yes no
cd:sectionnumber = yes no
criterium = SECTION local all
distance = DIMENSION
symbol = 1 2 ... n a ... none
interaction = pagenumber TEXT
expansion = yes no command
referencing = on off
command = \...#1
location = left middle right
maxwidth = DIMENSION
unknownreference = empty none
alternative = a b A B
prefix = both first none
compress = no yes
deeptextcommand = \...#1

\setuprotate [...,*,...]

* rotation = NUMBER
location = normal high fit broad depth
inherits from \setupframed

\setupscreens [...,*,...]

* method = dot rule external
resolution = NUMBER
factor = NUMBER
screen = NUMBER

`\setupsection [...]1 [...]2 [...]3,...]`

OPTIONAL

1 IDENTIFIER
2 IDENTIFIER
3 conversion = numbers characters Characters romannumerals Romannumerals
previousnumber = yes no

`\setupsectionblock [...]1 [...]2,...]`

1 IDENTIFIER
2 number = yes no
page = yes right
before = COMMAND
after = COMMAND

`\setupsorting [...]1 [...]2,...]`

1 IDENTIFIER
2 before = COMMAND
after = COMMAND
command = \...#1
state = start stop
criterium = all used
style = normal bold slanted boldslanted type cap small... COMMAND
expansion = yes no command

`\setupspacing [...]`

* broad packed

`\setupstrut [...]`

* yes no cap TEXT

`\setupsubpagenumber [...]*,...]`

* way = bytext bycd:section
state = start stop none

`\setupsymbolset [...]`

* IDENTIFIER

`\setupsynchronization [...]*,...]`

* state = start stop

`\setupsynchronizationbar [...]*,...]`

* alternative = page local
width = DIMENSION height fit
height = DIMENSION
style = normal bold slanted boldslanted type cap small... COMMAND
color = IDENTIFIER
inherits from \setupframed

`\setupsynonyms [...]1 [...]2,...]`

1 IDENTIFIER
2 textstyle = normal bold slanted boldslanted type cap small... COMMAND
synonymstyle = normal bold slanted boldslanted type cap small... COMMAND
location = left right top serried inmargin inleft inright
width = DIMENSION
state = start stop
criterium = all used
conversion = yes no
expansion = yes no command
command = \...#1#2#3

`\setupsystem [..,*.,..]`

* resolution = NUMBER
file = TEXT
directory = TEXT
random = normal small medium big NUMBER

`\setuptab [..,*.,..]`

* sample = TEXT
width = DIMENSION
headstyle = normal bold slanted boldslanted type cap small... COMMAND
location = left right

`\setuptables [..,*.,..]`

* distance = small medium big
bodyfont = 5pt ... 12pt small big
HL = NUMBER small medium big none
VL = NUMBER small medium big none
depth = NUMBER strut
height = NUMBER strut
rulethickness = DIMENSION
rulecolor = IDENTIFIER
align = inner outer left right flushleft flushright middle center normal no yes broad last r2l
12r
commands = COMMAND
align = inner outer left right flushleft flushright middle center normal no yes broad last r2l
12r
background = screen color none
backgroundscreen = NUMBER
backgroundcolor = IDENTIFIER
bodyfont = 5pt ... 12pt small big

`\setuptabulate [1.] [2..,*.,..]`
OPTIONAL

1 IDENTIFIER
2 unit = DIMENSION
indenting = never none not no yes always first next small medium big normal odd even DIMENSION
before = COMMAND
after = COMMAND
inner = COMMAND
EQ = TEXT
rulecolor = IDENTIFIER
align = inner outer left right flushleft flushright middle center normal no yes broad last r2l 12r
rulethickness = DIMENSION
distance = blank grid depth DIMENSION small medium big none
bodyfont = 5pt ... 12pt small big
rule = normal line
split = yes no

`\setuptext [1.] [2..,*.,..]`
OPTIONAL

1 *inherits from* \setupheader
2 *inherits from* \setupheader

`\setuptextrules [..,*.,..]`

* location = left inmargin
before = COMMAND
after = COMMAND
inbetween = COMMAND
width = DIMENSION
distance = DIMENSION
bodyfont = 5pt ... 12pt small big
color = IDENTIFIER
style = normal bold slanted boldslanted type cap small... COMMAND
rulecolor = IDENTIFIER

`\setuptexttexts [1.] [2.] [3.]`
OPTIONAL

1 text margin edge
2 TEXT SECTION date MARK pagenumber
3 TEXT SECTION date MARK pagenumber

`\setupthinrules [.*.]`

```
*   interlinespace = small medium big
    n              = NUMBER
    before         = COMMAND
    inbetween      = COMMAND
    after          = COMMAND
    color          = IDENTIFIER
    backgroundcolor = IDENTIFIER
    height         = DIMENSION max
    depth          = DIMENSION max
    alternative     = a b c d
    rulethickness  = DIMENSION
    color          = IDENTIFIER
    background     = color
    backgroundcolor = IDENTIFIER
```

`\setuptolerance [...,*,...]`

```
*   horizontal vertical stretch space verystrict strict tolerant verytolerant
```

`\setuptop [1.] [...,2.,...]`
OPTIONAL

```
1   inherits from \setupheader
2   inherits from \setupheader
```

`\setuptotexts [1.] [2.] [3.]`
OPTIONAL

```
1   text margin edge
2   TEXT SECTION date MARK pagenumber
3   TEXT SECTION date MARK pagenumber
```

`\setuptype [...,*,...]`

```
*   space = on off
    option = slanted normal none
    style  = normal bold slanted boldslanted type cap small... COMMAND
    color  = IDENTIFIER
    left   = COMMAND
    right  = COMMAND
    command = COMMAND
```

`\setuptyping [1.] [...,2.,...]`
OPTIONAL

```
1   file typing IDENTIFIER
2   space      = on off
    page       = yes no
    option     = slanted normal commands color none
    text       = yes no
    icommand   = COMMAND
    vcommand   = COMMAND
    ccommand   = COMMAND
    before     = COMMAND
    after      = COMMAND
    margin     = DIMENSION standard yes no
    evenmargin = DIMENSION
    oddmargin  = DIMENSION
    blank      = DIMENSION small medium big standard halflines line
    escape     = TEXT
    space      = on off
    tab        = NUMBER yes no
    page       = yes no
    indentnext = yes no
    style      = normal bold slanted boldslanted type cap small... COMMAND
    color      = IDENTIFIER
    palet      = IDENTIFIER
    range      = TEXT
    lines      = yes no hyphenated
    empty      = yes all no
    numbering  = line file no
    bodyfont   = 5pt ... 12pt small big
    strip      = no auto NUMBER
```

`\setupunderbar [...,*,...]`

* alternative = a b c
 rulethickness = DIMENSION
 bottomoffset = DIMENSION
 topoffset = DIMENSION
 rulecolor = IDENTIFIER

`\setupurl [...,*,...]`

* style = normal bold slanted boldslanted type cap small... COMMAND
 urlalternative = none both before after
 urlspace = yes no

`\setupversions [...,*,...]`

* number = NUMBER
 style = normal bold slanted boldslanted type cap small... COMMAND

`\setupwhitespace [...]`

OPTIONAL

* none small medium big line fixed fix DIMENSION

`\showbodyfont [...,*,...]`

OPTIONAL

* inherits from \setupbodyfont

`\showbodyfontenvironment [...,*,...]`

OPTIONAL

* inherits from \setupbodyfont

`\showcolor [...]`

* IDENTIFIER

`\showcolorgroup [...1][...2,...]`

1 IDENTIFIER
2 horizontal vertical name value NUMBER

`\showexternalfigures [...,*,...]`

OPTIONAL

* alternative = a b c

`\showfields [...,*,...]`

OPTIONAL

* IDENTIFIER

`\showframe [...]`

OPTIONAL

* TEXT margin edge

`\showgrid [...1,...]{...2}`

OPTIONAL

1 reset top bottom none all lines frame nonumber right left outer
2 CONTENT

`\showlayout`

`\showmakeup`

`\showpalet [...1][...2,...]`

1 IDENTIFIER
2 horizontal vertical name value

`\showprint [...,1...] [...,2...] [...,3_,...]`

1 *inherits from* \setuppapersize
2 *inherits from* \setuppapersize
3 *inherits from* \setuplayout

`\showsetups`

`\showstruts`

`\showsymbolset [...]`

* IDENTIFIER

`\someline [...]`

* REFERENCE

`\somewhere {...} {...} [...]`

1 CONTENT
2 CONTENT
3 REFERENCE

`\SORT [...]1 {...}2}`

1 TEXT
2 CONTENT

`\space`

`\splitfloat [...,1_,...]OPTIONAL {...}2 {...}3}`

1 *inherits from* \setupfloatsplitting
2 CONTENT
3 CONTENT

`\startalignment [...,OPTIONAL_,...] ... \stopalignment`

* *inherits from* \setupalign

`\startbackground {...} ... \stopbackground`

* CONTENT

`\startbuffer [...]OPTIONAL ... \stopbuffer`

* IDENTIFIER

`\startBUFFER [...]OPTIONAL ... \stopBUFFER`

* IDENTIFIER

`\startcolor [...] ... \stopcolor`

* IDENTIFIER

`\startcolumns [...,OPTIONAL_,...] ... \stopcolumns`

* *inherits from* \setupcolumns

`\startcombination [...] ... \stopcombination`

* N*M

`\startcomment [.1.] [...,.2.,...] ... \stopcomment`

OPTIONAL OPTIONAL

- 1 IDENTIFIER
- 2 *inherits from* \setupcomment

`\startcomponent \stopcomponent`

- * FILE NAME

`\startDESCRIPTION {...} ... \stopDESCRIPTION`

- * CONTENT

`\startdocument [...] ... \stopdocument`

- * IDENTIFIER

`\startENUMERATION ... \stopENUMERATION`

`\startenvironment \stopenvironment`

- * FILE NAME

`\startfact .1. .2. .3. ... \stopfact`

- 1 NOTHING
- 2 NOTHING
- 3 NOTHING

`\startfigure [.1.] [.2.] [...,.3.,...] ... \stopfigure`

- 1 IDENTIFIER
- 2 FILE
- 3 factor = NUMBER
- frame = on off

`\startFLOATtext [.1.] [.2.] {.3.} {.4.} ... \stopFLOATtext`

OPTIONAL OPTIONAL

- 1 left right high middle low offset tall
- 2 REFERENCE
- 3 CONTENT
- 4 CONTENT

`\startFORMULA ... \stopFORMULA`

`\startFRAMEDTEXT [.1.] [...,.2.,...] ... \stopFRAMEDTEXT`

OPTIONAL OPTIONAL

- 1 left right middle none
- 2 *inherits from* \setupframedtexts

`\starthiding ... \stophiding`

`\startinteractionmenu [...] ... \stopinteractionmenu`

- * IDENTIFIER

`\startITEMGROUP [.1.] [...,.2.,...] [...,.3.,...] ... \stopITEMGROUP`

OPTIONAL OPTIONAL

- 1 IDENTIFIER
- 2 a A KA n N m r R KR NUMBER continue standard broad serried packed stopper joinedup atmargin inmargin intro columns text paragraph repeat
- 3 *inherits from* \setupitemgroup

`\startlegend [...]1 ...2 ...3 ...4 ... \stoplegend`

OPTIONAL

- 1 two
- 2 NOTHING
- 3 NOTHING
- 4 NOTHING

`\startline [...]* ... \stopline`

- * REFERENCE

`\startlinecorrection ... \stoplinecorrection`

`\startlinenumbering [...]* ... \stoplinenumbering`

- * continue

`\startlines ... \stoplines`

`\startlocal ... \stoplocal`

`\startlocalenvironment ... \stoplocalenvironment`

`\startlocalfootnotes ... \stoplocalfootnotes`

`\startmakeup [...]1 [...,2...]OPTIONAL ... \stopmakeup`

- 1 IDENTIFIER
- 2 *inherits from* \setupmakeup

`\startmarginblock ... \stopmarginblock`

`\startmarginrule [...]* ... \stopmarginrule`

- * NUMBER

`\startNAMEmakeup ... \stopNAMEmakeup`

`\startnarrower [...]*...]OPTIONAL ... \stopnarrower`

- * left middle right -left -middle -right -none

`\startopposite ... \stopopposite`

`\startoverlay {...}1 {...}2 ... \stopoverlay`

- 1 CONTENT
- 2 CONTENT

`\startoverview [...]*... \stopoverview`

- * IDENTIFIER

`\startpacked [...]* ... \stoppacked`

OPTIONAL

- * blank

`\startPARAGRAPH ... \stopPARAGRAPH`

`\startpositioning ... \stoppositioning`

| |
|--|
| <code>\startpostponing ... \stoppostponing</code> |
| <code>\startproduct ... \stopproduct</code> <code>* FILE NAME</code> |
| <code>\startprofile [...,*,...] ... \stopprofile</code> <code>* IDENTIFIER</code> |
| <code>\startproject ... \stopproject</code> <code>* FILE NAME</code> |
| <code>\startquotation [...,*,...] ... \stopquotation</code> <code>* left <u>middle</u> right</code> |
| <code>\startREGISTER [...¹.] {...+...²+...}</code> <div>OPTIONAL</div> <code>1 TEXT</code> <code>2 INDEX</code> |
| <code>\startsymbolset [...*] ... \stopsymbolset</code> <code>* IDENTIFIER</code> |
| <code>\startsynchynchronization ... \stopsynchynchronization</code> |
| <code>\starttable [...*] ... \stoptable</code> <code>* TEXT IDENTIFIER</code> |
| <code>\starttables [...*] ... \stoptables</code> <code>* TEXT IDENTIFIER</code> |
| <code>\startTABULATE [...¹.] [...,.<u>2</u>.,...] ... \stopTABULATE</code> <div>OPTIONAL OPTIONAL</div> <code>1 TEXT</code> <code>2 inherits from \setupexternalfigures</code> |
| <code>\starttextrule [...¹.] {...².} ... \stoptextrule</code> <div>OPTIONAL OPTIONAL</div> <code>1 top bottom</code> <code>2 CONTENT</code> |
| <code>\startTYPING ... \stopTYPING</code> |
| <code>\startunpacked ... \stopunpacked</code> |
| <code>\startversion [...,*,...] ... \stopversion</code> <code>* NUMBER</code> |
| <code>\stretched {...*}</code> <code>* WORD</code> |
| <code>\sub [...,*,...]</code> <div>OPTIONAL</div> <code>* REFERENCE</code> |

`\subject [...1...] {...2}`

OPTIONAL

- 1 REFERENCE
- 2 CONTENT

`\subsection [...1...] {...2}`

OPTIONAL

- 1 REFERENCE
- 2 CONTENT

`\subsubject [...1...] {...2}`

OPTIONAL

- 1 REFERENCE
- 2 CONTENT

`\subsubsection [...1...] {...2}`

OPTIONAL

- 1 REFERENCE
- 2 CONTENT

`\subsubsubject [...1...] {...2}`

OPTIONAL

- 1 REFERENCE
- 2 CONTENT

`\switchtobodyfont [...*,...]`

- * IDENTIFIER serif regular roman sans support sansserif mono type teletype handwritten calligraphic 5pt ... 12pt
small big

`\sym {...}`

- * CONTENT

`\symbol [...1] [...2]`

OPTIONAL

- 1 IDENTIFIER
- 2 IDENTIFIER

`\synchronizationbar [...1] [...,2,...]`

- 1 IDENTIFIER
- 2 alternative = page local
inherits from \setupsynchronizationbar

`\synchronize`

`\SYNONYM [...1] {...2} {...3}`

OPTIONAL

- 1 TEXT
- 2 CONTENT
- 3 CONTENT

`\tab {...1} .2.`

- 1 CONTENT
- 2 NOTHING

`\tex {...}`

- * CONTENT

`\textreference [...1] {...2}`

- 1 REFERENCE
- 2 CONTENT

```
\textrule [...1] {...2}  
                OPTIONAL  OPTIONAL  
1  top bottom  
2  CONTENT
```

```
\thinrule
```

```
\thinrules [...*.]  
                OPTIONAL  
*  inherits from \setupthinrules
```

```
\title [...1,...] {...2}  
                OPTIONAL  
1  REFERENCE  
2  CONTENT
```

```
\tooltip [...1.] {...2.} {...3.}  
                OPTIONAL  
1  left right middle  
2  CONTENT  
3  CONTENT
```

```
\translate [...*.,...]  
*  IDENTIFIER = TEXT
```

```
\typ {...}  
*  CONTENT
```

```
\type {...}  
*  CONTENT
```

```
\typebuffer [...*.]  
*  IDENTIFIER
```

```
\typefile [...1.] {...2.}  
                OPTIONAL  
1  IDENTIFIER  
2  CONTENT
```

```
\underbar {...}  
*  CONTENT
```

```
\underbars {...*... ..}  
*  WORD
```

```
\useblocks [...1,...] [...2,...]  
                OPTIONAL  
1  IDENTIFIER  
2  IDENTIFIER
```

```
\usecommands {...}  
*  CONTENT
```

```
\usedirectory [...*,...]  
*  IDENTIFIER reset
```

`\useencoding [...*...]`

`* IDENTIFIER`

`\useexternaldocument [.1.] [.2.] [.3.]`

1 IDENTIFIER
2 file
3 TEXT

`\useexternalfigure [.1.] [.2.] [.3.] [.,.4.,...]`
OPTIONAL OPTIONAL OPTIONAL

1 IDENTIFIER
2 FILE
3 IDENTIFIER
4 *inherits from \setupexternalfigures*

`\useexternalfile [.1.] [.2.] [.3.] [.,.4.,...]`

1 IDENTIFIER
2 IDENTIFIER
3 FILE
4 bodyfont = 5pt ... 12pt small big

`\useexternalfiles [.1.] [.,.2.,...]`

1 IDENTIFIER
2 bodyfont = 5pt ... 12pt small big
file = FILE

`\useexternalsoundtrack [.1.] [.2.]`

1 IDENTIFIER
2 FILE

`\usemodule [...*...]`

`* IDENTIFIER`

`\userreferences [...*...]`

`* FILE`

`\usespecials [...*...]`

`* reset IDENTIFIER`

`\usesymbols [...*]`

`* IDENTIFIER`

`\usetypescript [...1...] [...2...] [...3...]`
OPTIONAL OPTIONAL

1 IDENTIFIER
2 IDENTIFIER
3 IDENTIFIER

`\usetypescriptfile [...*...]`

`* FILE`

`\useURL [.1.] [.2.] [.3.] [.4.]`

1 IDENTIFIER
2 TEXT
3 file
4 TEXT

\version [...]

* final concept temporary

\v1 [...]

* NUMBER

\WEEKDAY {...}

* CONTENT

\WORD {...}

* WORD

\WORDS {... * ... }

* WORD

\Word {...}

* WORD

\Words {... * ... }

* WORD

\weekday {...}

* CONTENT

\whitespace

\wordright {...}

* CONTENT

\writebetweenlist [.¹.] [...,.².,...] {.³.}

1 SECTION IDENTIFIER
2 location = here none
3 CONTENT

\writetolist [.¹.] [...,.².,...] {.³.} {.⁴.}

1 SECTION IDENTIFIER
2 location = here none
3 CONTENT
4 CONTENT


\writetoreferencelist [.¹.] {.².} {.³.}

1 IDENTIFIER
2 CONTENT
3 CONTENT

\writetoregister [.¹.] [.².] {..³..+..}

1 SINGULAR NAME
2 TEXT
3 INDEX

OPTIONAL

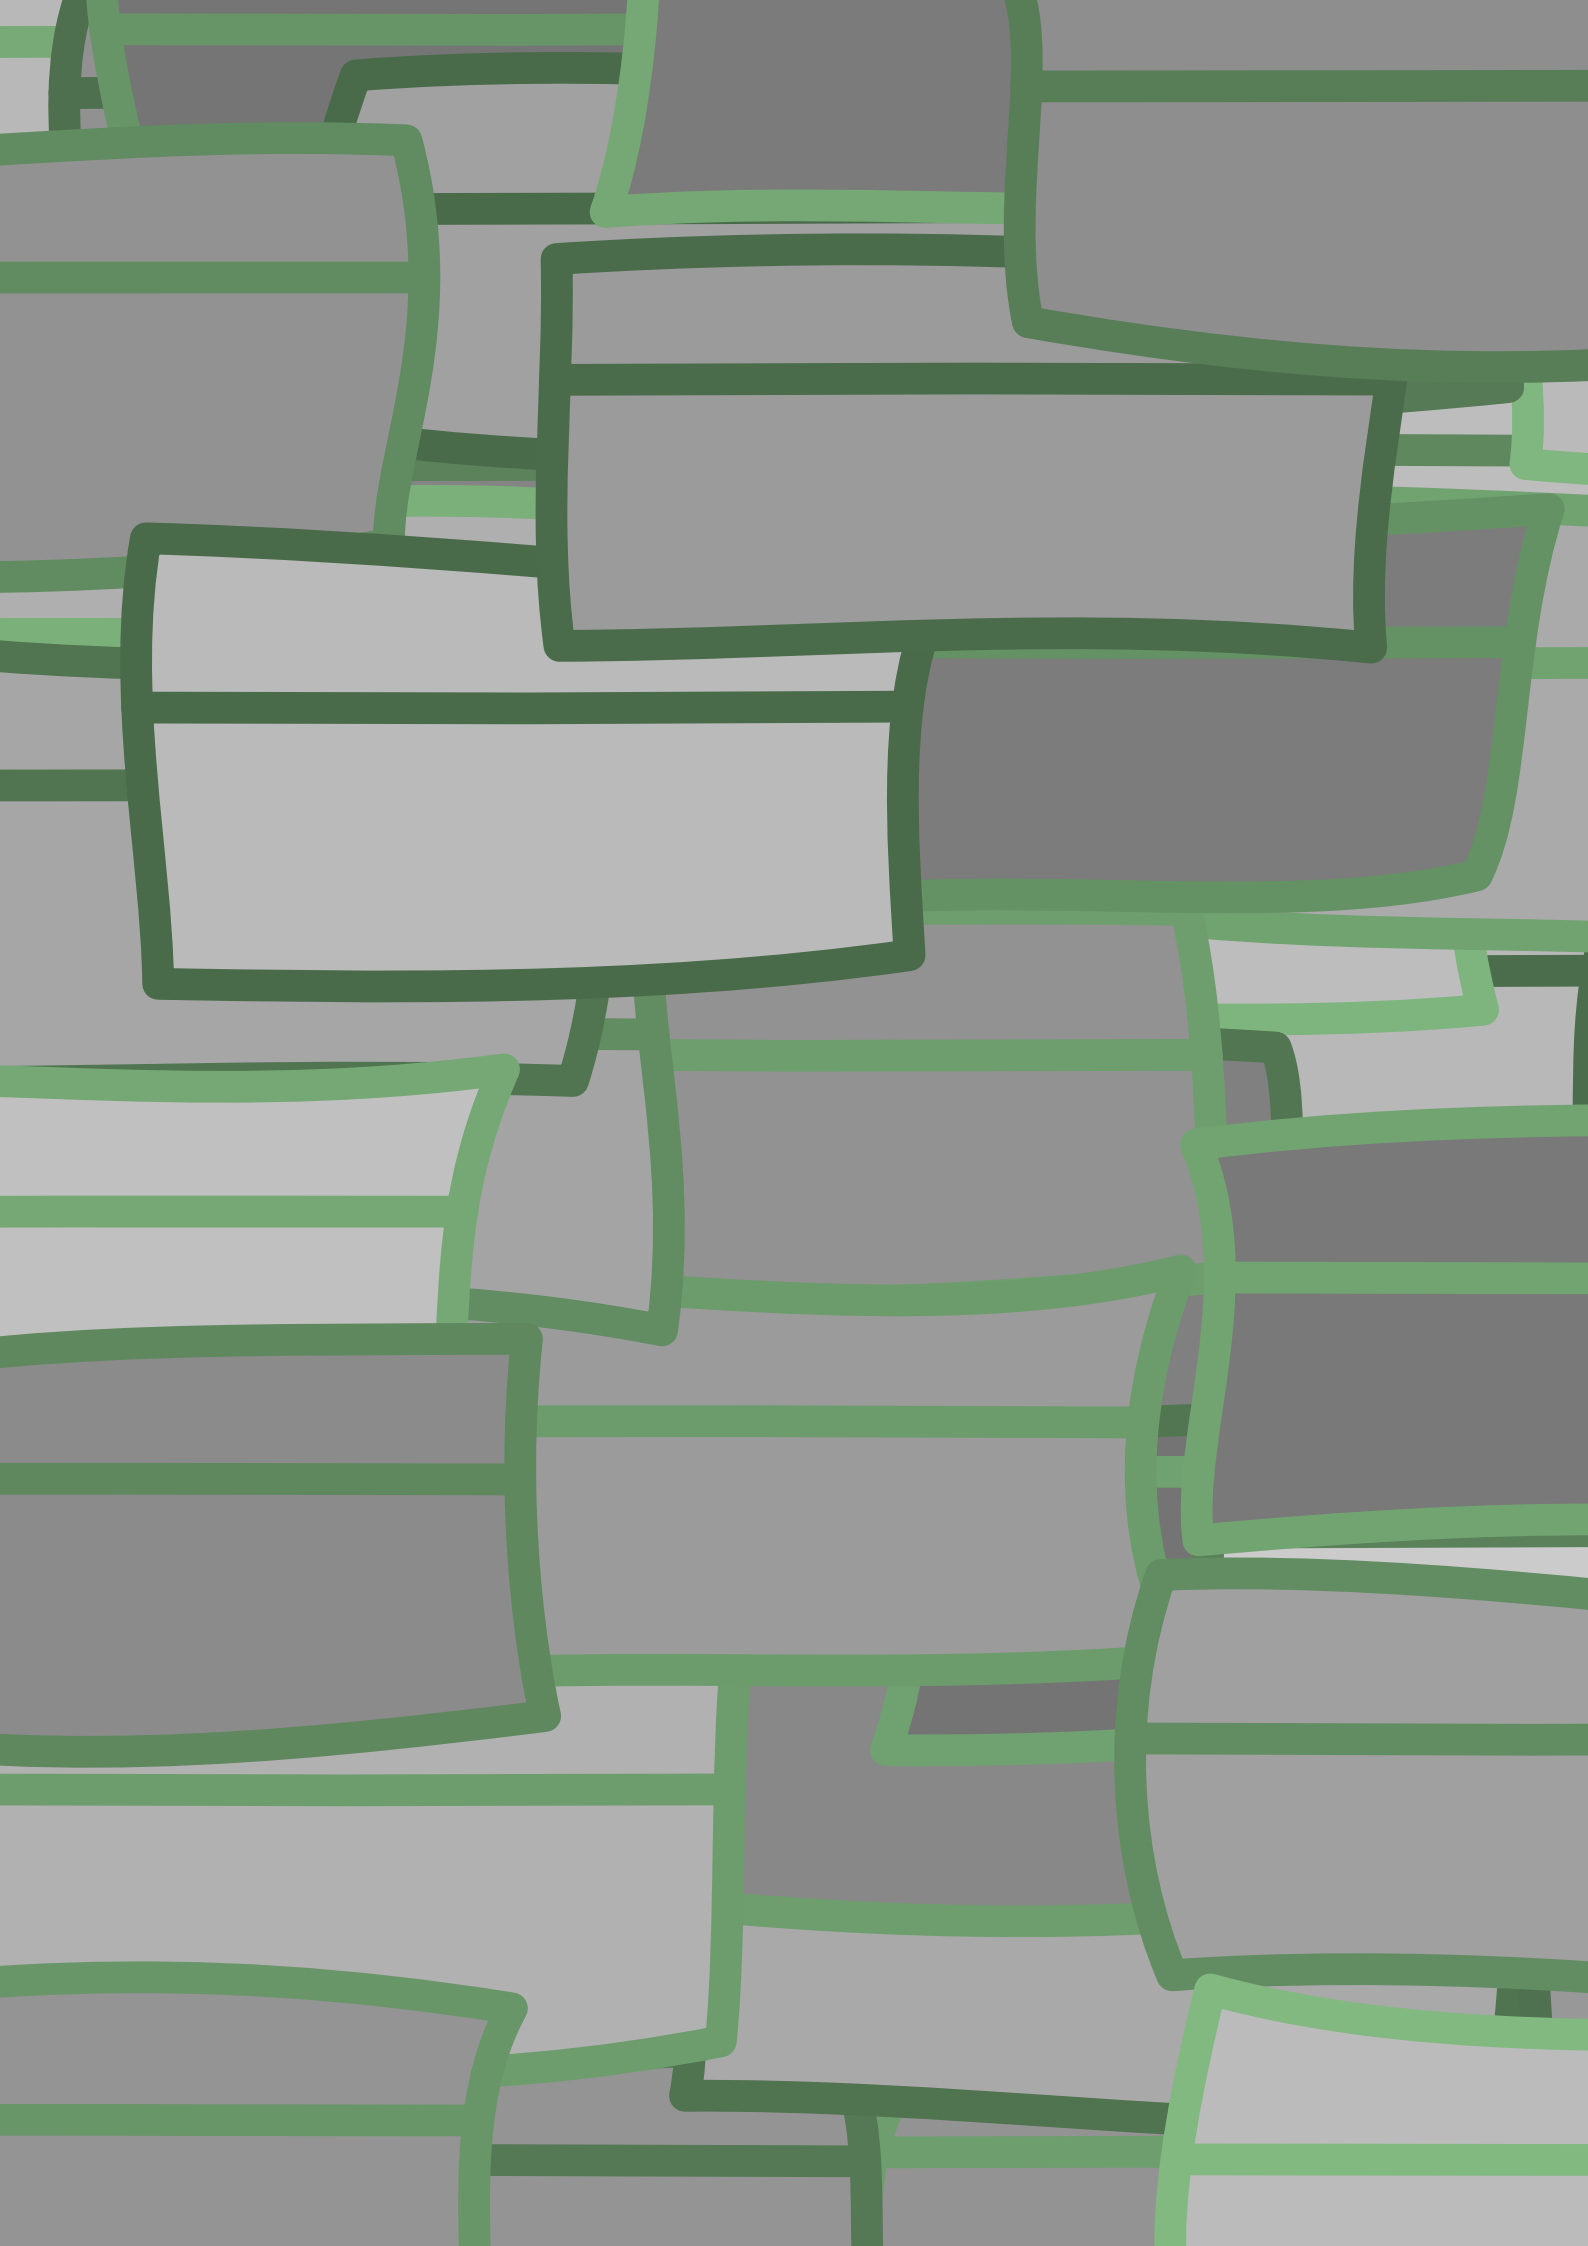

PRAGMA ADE
Ridderstraat 27
8061GH Hasselt NL
www.pragma-ade.com

